

MODBUS DISPLAY

WITH ALARM AND ANALOG OUTPUTS



Advantages

- Robust IP67 (NEMA Type4X) field enclosure. It is so rugged, **you can even stand on it!**
- Intrinsically Safe available - ATEX and IECEx approval for gas and dust applications.
- Programming can be done by your own crew, with the sensible menu-driven structure, saving cost and irritation. **Know one, know them all!**
- Very diverse mounting possibilities: walls, pipes, panels or directly onto outdoor sensors!

Features

- Fully controlled through Modbus ASCII / RTU communication protocol.
- 9 different product / tank values can be displayed.
- Displays actual value, product / tank I.D., measuring unit, status and alarm messages.
- Actual values are operator selectable or with the automatic toggle function.
- Alarms can be terminated through communication or after operator interaction.
- Actual value: six large 17mm (0.67") digits.
- Explosion/flame proof available.
- Loop or battery powered, 8 - 24V AC/DC or 115 - 230V AC.

Signal output

- 4 - 20mA / 0 - 10 V DC output re-transmitting any value set through communication - the output can be scaled to any previously set range.
- Up to four configurable alarm outputs controlled through communication or related to the actual product / tank values.

Signal input

- None.

Applications

- The F-Series is your first and safest choice for field mount indicators in safe and hazardous area applications. Especially in harsh weather conditions like rain, snow, salty atmospheres and temperatures between -40°C up to +80°C (-40°F up to 176°F).
- Local indication and monitoring of process parameters where the actual information is provided through a Modbus communication link and not a sensor. For DIN panel mount indicators, check our [D-Series](#).

General information

Introduction

The F193 is a versatile large digit Modbus display. All displayed information and signal outputs are controlled through the Modbus ASCII / RTU communication protocol. Information of nine different tanks or products can be displayed with an automatic toggle function or can be selected by the operator.

Off-course, it can also be selected and locked through communication. A wide range of options further enhance this models capabilities, including Intrinsic Safety for hazardous area applications.

Display

The display has large 17mm segments which can be set to show actual value. On-screen engineering units are easily configured from a comprehensive menu, whilst different units for product / tank I.D. can be displayed simultaneously. The status and alarm messages can register up to 11 digits.

Configuration

All configuration settings are accessed via a simple operator menu which can be password protected. Each setting is clearly indicated with an alphanumerical description, which avoids confusing abbreviations and baffling codes. Once familiar with one F-series product, you will be able to program all models in the series without a manual. All settings are safely stored in EEPROM memory in the event of sudden power loss.

Analog output signal

Also available is an (o)₄ - 20mA or 0 - 10V DC output signal, fully controlled through the communication. For security reasons, all outputs can be switched-off automatically in case of a communication break-down. The output signal is updated eight times per second with a filter function being available to smooth the signal if desired. The output signal can be passive, active or isolated where the passive output type will loop power the F193 as well.

Alarm outputs

Up to four control or alarm outputs can be controlled directly or being linked to an alarm status of the nine products: an alarm message will be displayed and the related relay(s) switched. The output signal can be a passive NPN, active PNP or an isolated electromechanical relay.

Communication

All displayed information and signal outputs are controlled through the Modbus ASCII / RTU communication protocol (RS232 / RS485). Full Modbus functionality remains available for the Intrinsically Safe version (TTL).


Hazardous areas

This model has been ATEX and IECEx certified Intrinsically Safe for gas and dust applications, with an allowed ambient temperature of -40°C to +70°C (-40°F to +158°F). A flame proof Ex d enclosure with ATEX certification is also available.


Enclosures

Various types of enclosures can be selected, all ATEX and IECEx approved. As standard the F110 is supplied in an GRP panel mount enclosure, which can be converted to an IP67 / NEMA Type4X GRP field mount enclosure by the addition of a back case. Most popular is our rugged aluminum field mount enclosure with IP67 / NEMA Type4X rating. Both European or U.S. cable gland entry threads are available.


Overview application F193

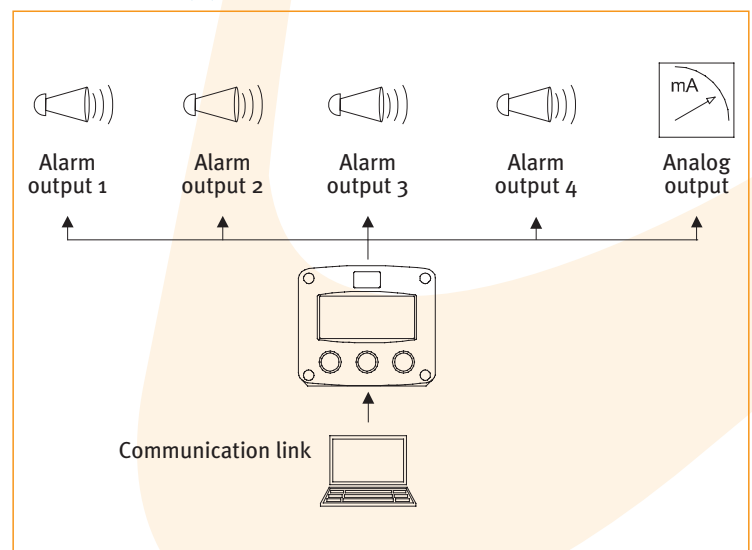


Typical wiring diagram F193-AP-CH-OT-PX

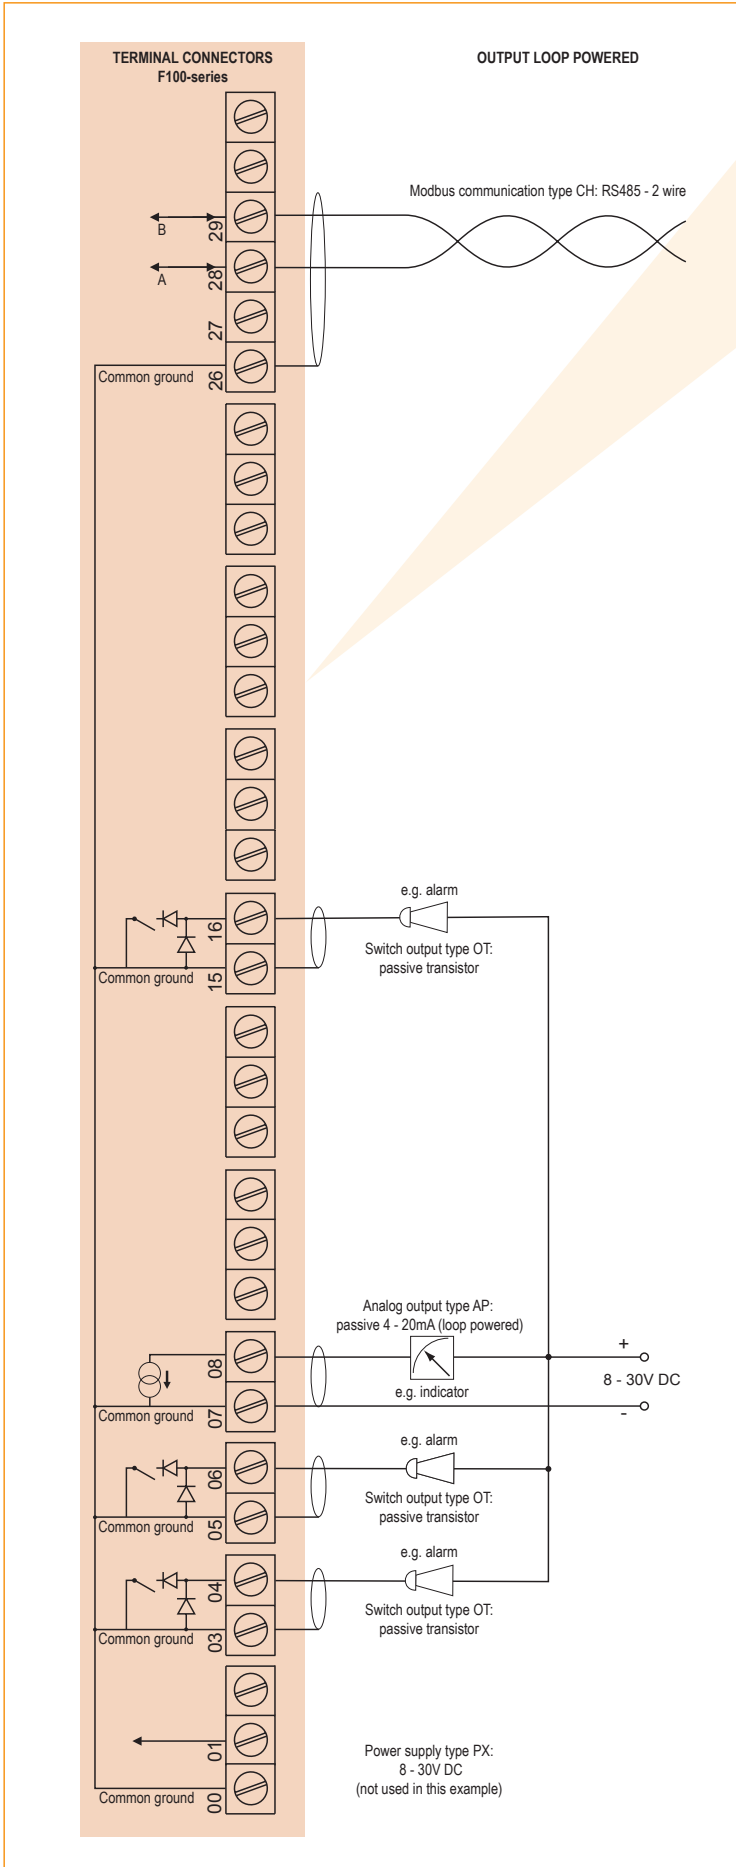


Typical wiring diagram F193-AA-CB-OA-PD

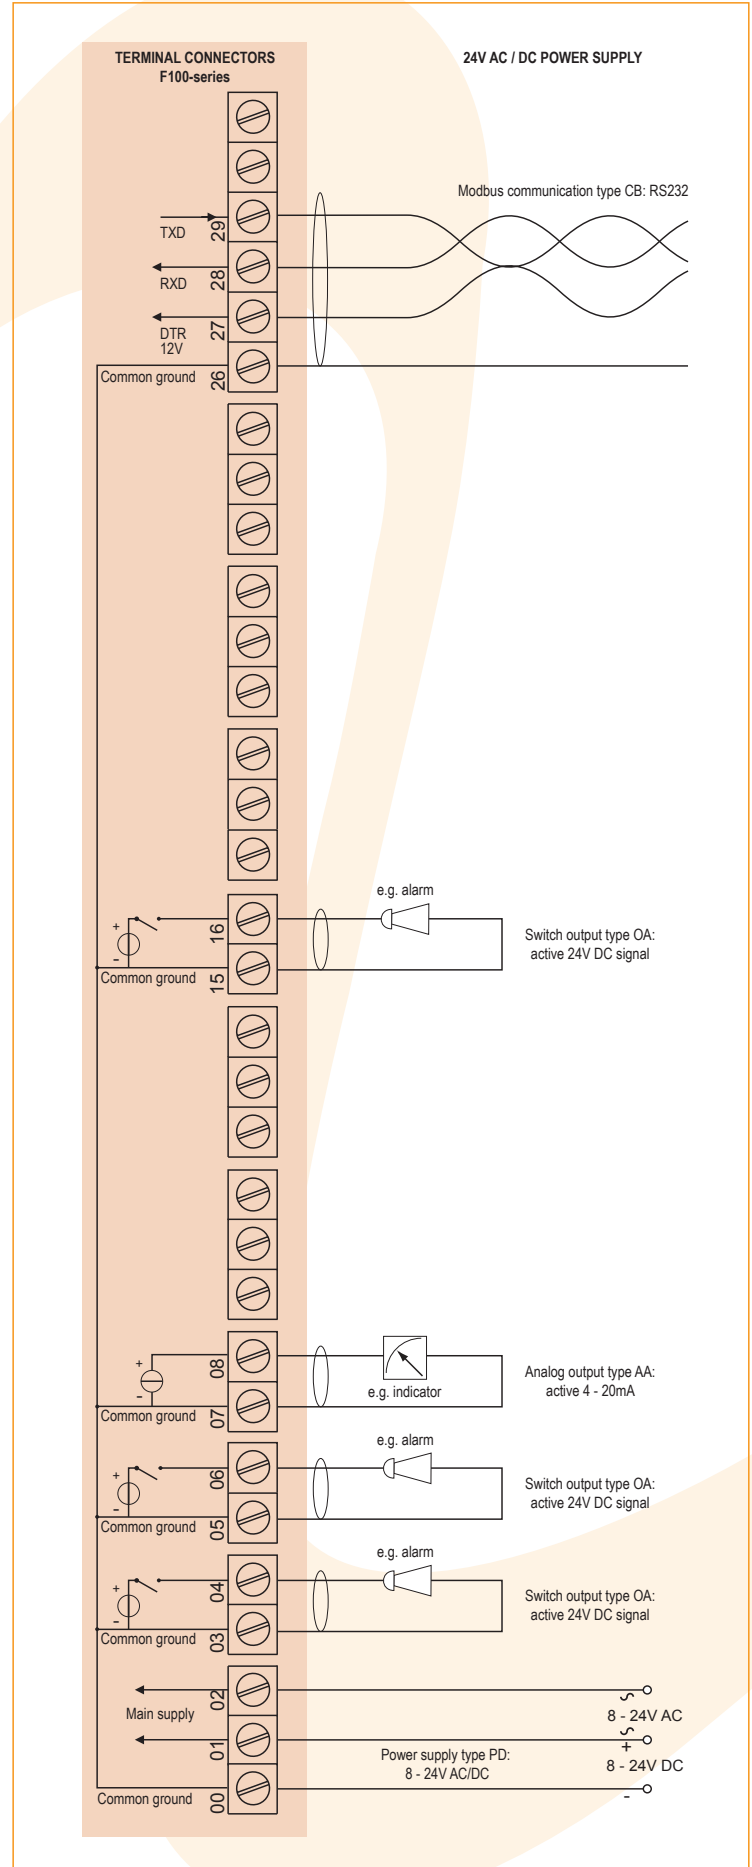

Typical wiring diagram F193-AI-CI-OR-PM

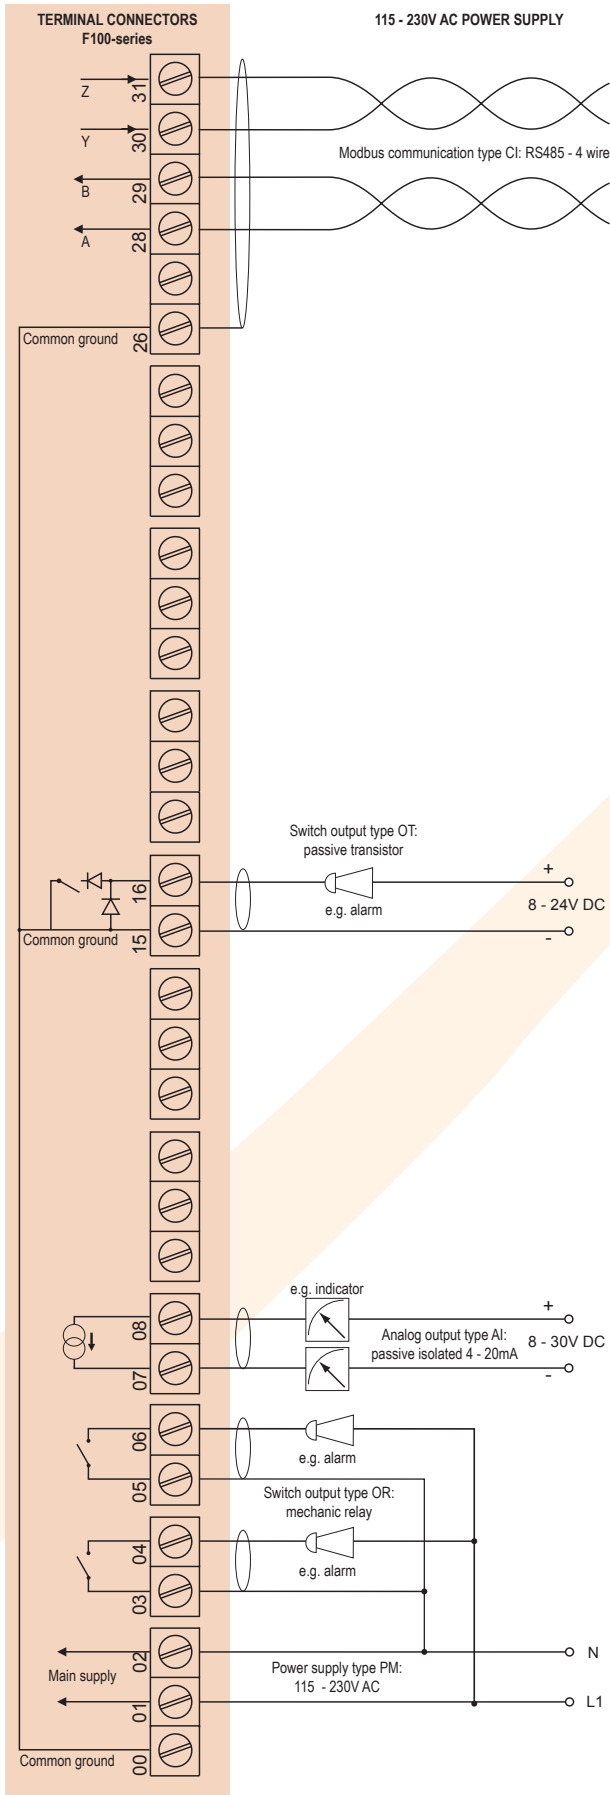

Typical wiring diagram F193-AP-CB-OS-PD

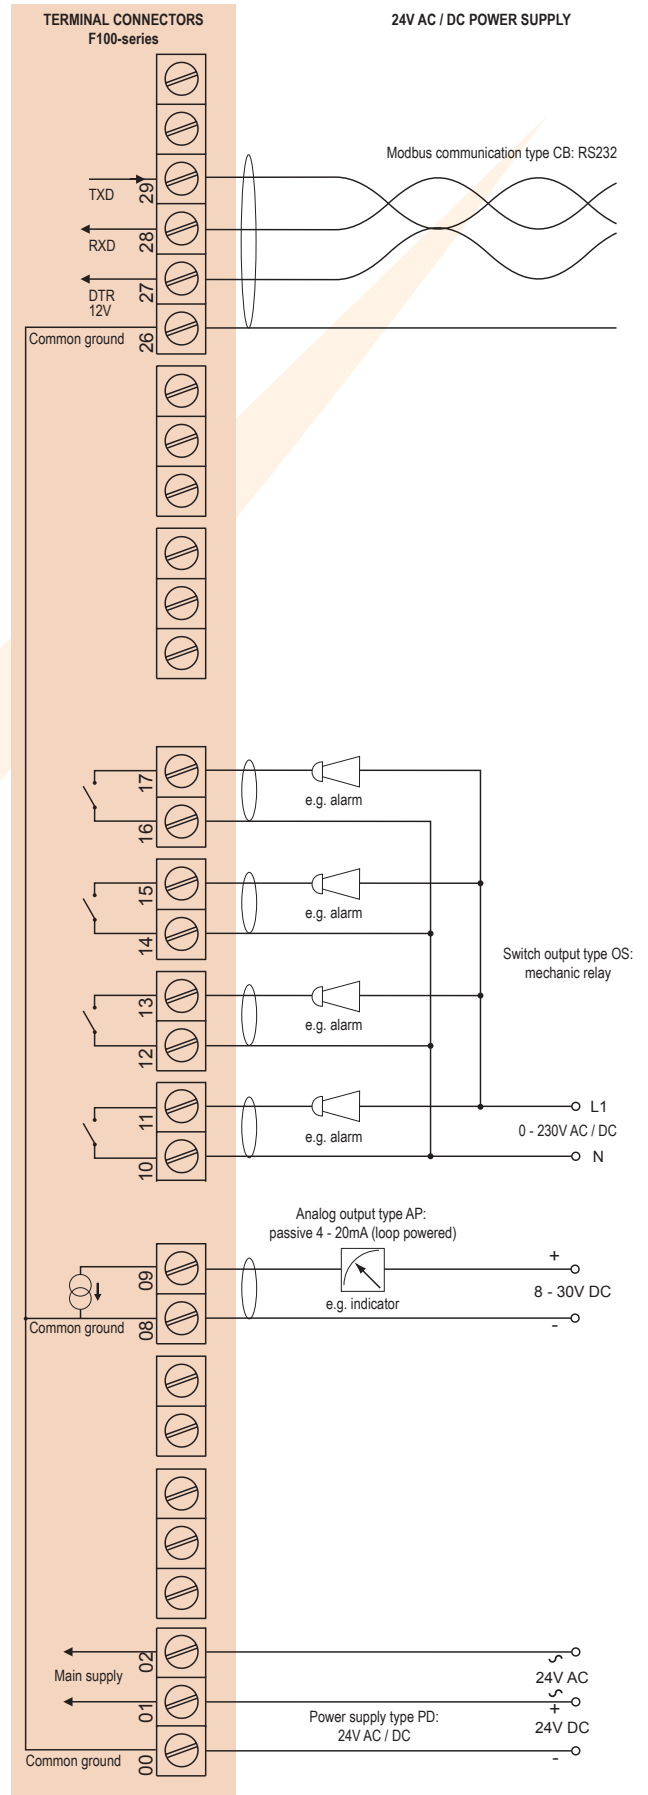

Hazardous area applications

The F193-XI has been certified according ATEX and IECEx by DEKRA for use in Intrinsically Safe applications with an ambient temperature of -40°C to $+70^{\circ}\text{C}$ (-40°F to $+158^{\circ}\text{F}$).

- The ATEX markings for gas and dust applications are:

II 1 G Ex ia IIB/IIC T4 Ga
II 1 D Ex ia IIIC T100 °C Da.

- The IECEx markings for gas and dust applications are: **Ex ia IIC/IIB T4 Ga** and **Ex ia IIIC T100 °C Da.**

It is allowed to connect up to six barriers in IIB/IIIC applications, the F193 is not suitable for IIC applications. Consult the certificate for the maximum input and output values of the circuits. Full functionality of the F193 remains available, including Modbus communication type CT.


An ATEX approved flame proof Ex d enclosure is available as well. Please contact your supplier for further details.

Certificate of conformity KEMA 03ATEX1074 X


• IECEx DEK 11.0042X



Configuration example IIB / IIIC and IIIC - F193-AP-CT-OT-PX-XI - Output loop powered

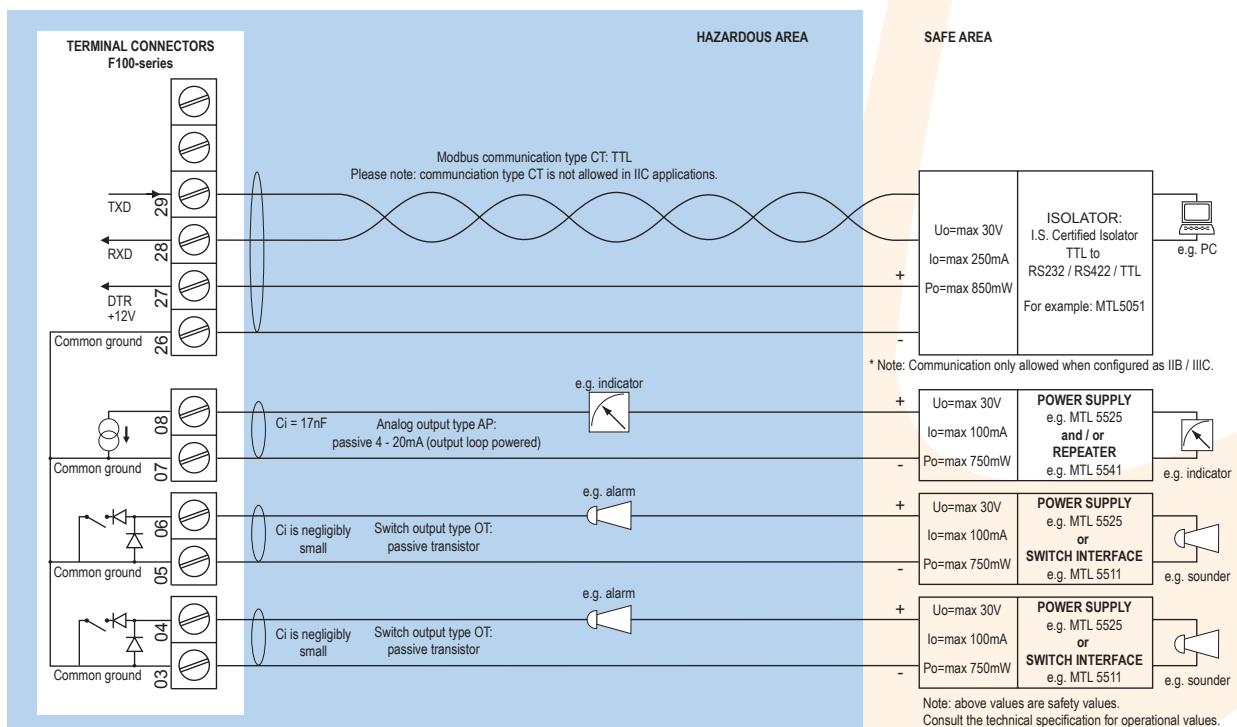

Configuration example IIB / IIIC and IIIC - F193-AF-CT-OT-PD-XI - Power requirement 16 - 30V DC

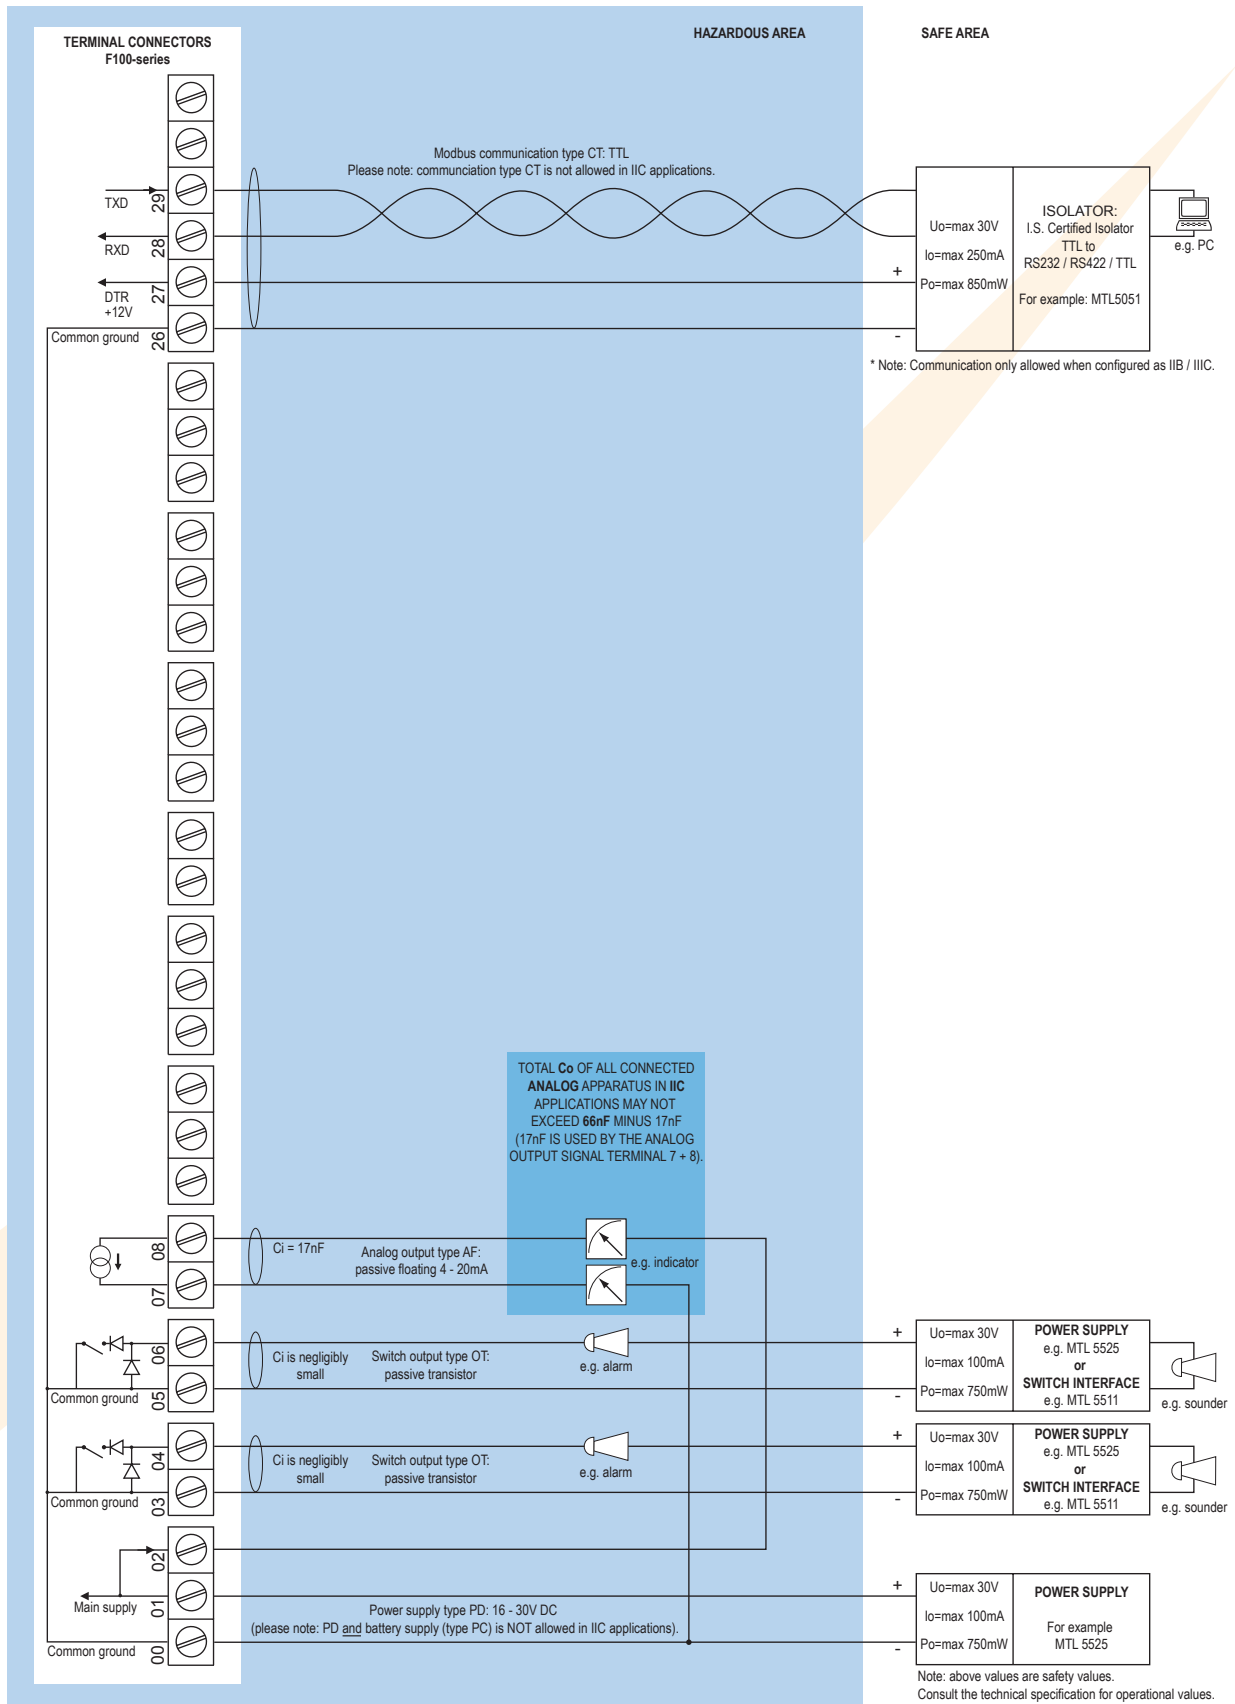

Technical specification

General

Display	
Type	High intensity reflective numeric and alphanumeric LCD, UV-resistant.
Dimensions	90 x 40mm (3.5" x 1.6").
Digits	Seven 17mm (0.67") and eleven 8mm (0.31") digits. Various symbols and measuring units.
Refresh rate	User definable: fast, 1sec, 3sec, 15sec, 30sec, off.
Option ZB	Transflective LCD with white LED-backlight. Good readings in full sunlight and darkness.
Note ZB	Only available for safe area applications.

Ambient temperature

Safe areas	-40°C to +80°C (-40°F to +176°F).
Intrinsically Safe	-40°C to +70°C (-40°F to +158°F).

Power requirements

Type AP	Analog output loop powerd, 8 - 30V DC. Power consumption max 0.5 Watt.
Type PB	Long life Lithium battery - life-time depends upon settings and configuration - up to 5 years. (requires PD or PX)
Type PC	Intrinsically Safe long life lithium battery - life-time depends upon settings and configuration - up to 5 years. (requires XI and PD or PX)
Type PD	8 - 24V AC / DC ± 10%. Power consumption max. 10 Watt. Intrinsically Safe: 16 - 30V DC; power consumption max. 0.75 Watt.
Type PF	24V AC / DC ± 10%. Power consumption max. 15 Watt.
Type PM	115 - 230V AC ± 10%. Power consumption max. 15 Watt.
Type PX	8 - 30V DC. Power consumption max. 0.5 Watt.
Type ZB	12 - 24V DC ± 10%. Power consumption max. 1 Watt.
Note PB/PF/PM	Not available Intrinsically Safe.
Note PF/PM	The total consumption of the sensors and outputs may not exceed 400mA @ 24V.
Note	For Intrinsically Safe applications, consult the safety values in the certificate.

Terminal connections

Type	Removable plug-in terminal strip. Wire max. 1.5mm ² and 2.5mm ² .
------	---

Data protection

Type	EEPROM backup of all settings. Data retention at least 10 years.
Password	Configuration settings can be password protected.

Directives & Standards

EMC	Directive 2014/30/EU, FCC 47 CFR part 15.
Low voltage	Directive 2014/35/EU
RoHS	Directive 2011/65/EU
ATEX / IECEx	Directive 2014/34/EU, IEC 60079-0, IEC 60079-11.
IP & NEMA	EN 60529 & NEMA 250

Enclosure

General

Window	Polycarbonate window.
Sealing	Silicone.
Control keys	Three industrial micro-switch keys. UV-resistant silicone keypad.

Aluminum wall / field mount enclosures

General	Die-cast aluminum wall/field mount enclosure IP67 / NEMA Type4X with 2-component UV-resistant coating.
Dimensions	130 x 120 x 75mm (5.12" x 4.72" x 2.95") - W x H x D.
Weight	1100 gr.
Type HA	Cable entry: 2 x PG9 and 1 x M20.
Type HL	Cable entry: 3 x 1/2" NPT.
Type HM	Cable entry: 2 x M16 and 1 x M20.
Type HN	Cable entry: 1 x M20.
Type HO	Cable entry: 2 x M20.
Type HP	Cable entry: 6 x M12.
Type HT	Cable entry: 1 x 1/2" NPT.
Type HU	Cable entry: 3 x 1/2" NPT.
Type HV	Cable entry: 4 x M20.
Type HZ	Cable entry: no holes.

GRP wall / field mount enclosures



General	GRP wall/field mount enclosure IP67 / NEMA Type4X, UV-resistant and flame retardant.
Dimensions	130 x 120 x 75mm (5.12" x 4.72" x 2.95") - W x H x D.
Weight	600 gr.
Type HD	Cable entry: no holes.
Type HE	Cable entry: 2 x Ø 16mm and 1 x Ø 20mm.
Type HF	Cable entry: 1 x Ø 22mm (7/8").
Type HG	Cable entry: 2 x Ø 20mm.
Type HH	Cable entry: 6 x Ø 12mm.
Type HJ	Cable entry: 3 x Ø 22mm (7/8").
Type HK	Flat bottom, cable entry: no holes.

Panel mount enclosures


Dimensions	130 x 120 x 60mm (5.12" x 4.72" x 2.36") - W x H x D.
Panel cut-out	115 x 98mm (4.53" x 3.86") L x H.
Type HB	Die-cast aluminum panel mount enclosure IP65 / NEMA Type4X.
Weight	600 gr.
Type HC	GRP panel mount enclosure IP65 / NEMA Type4X, UV-resistant and flame retardant.
Weight	450 gr..

Hazardous area

Intrinsically Safe (Type XI)

ATEX certification	 II 1 G Ex ia IIB/IIC T4 Ga. II 1 D Ex ia IIIC T100 °C Da.
IECEX certification	 Ex ia IIC/IIB T4 Ga. Ex ia IIIC T100 °C Da.
Ambient Ta	-40°C to +70°C (-40°F to +158°F).

Explosion proof (Type XF)

ATEX certification	 II 2 G / Ex d IIB T5 Gb. II 2 D / Ex t IIB T100 °C Db.
Type XF	Dimensions of enclosure: 300 x 250 x 200mm (11.8" x 9.9" x 7.9") L x H x D.
Weight	Appr. 15kg.
Note	IECEX available on request.

Signal inputs

Communication

Function	Writing display information, controlling the analog and alarm outputs, reading / writing all settings.
Protocol	Modbus ASCII / RTU.
Speed	1200 - 2400 - 4800 - 9600 baud.
Addressing	Maximum 255 addresses.
Type CB	RS232
Type CH	RS485 2-wire
Type CI	RS485 4-wire
Type CT	TTL Intrinsically Safe.

Signal outputs

Analog output

Function	Transmitting any value set through communication.
Accuracy	10 bit. Error < 0.05%. Analog output signal can be scaled to any desired range.
Update time	Eight times per second.
Type AA	Active 4 - 20mA output (requires PD, PF, PM or PX).
Type AB	Active 0 - 20mA output (requires PD, PF, PM or PX).
Type AF	Passive floating 4 - 20mA output for Intrinsically Safe applications (requires XI + PD or PX).
Type AI	Passive galvanically isolated 4 - 20mA output - also available for battery powered models.
Type AP	Passive 4 - 20mA output - not isolated. Unit will be loop powered.
Type AU	Active 0 - 10V DC output (requires PD, PF, PM or PX).

Digital outputs

Function	Transmitting an alarm condition or to control a device through communication.
Type OA	Three active 24V DC transistor outputs (PNP); max. 50mA per output (requires PD, PF, PM or PX).
Type OR	Two electro-mechanical relay outputs isolated (N.O.) - max. switch power 230V AC - 0.5A (requires PF or PM) and one transistor output OT or OA.
Type OS	Four electro-mechanical relay outputs - isolated; max. switch power 230V AC - 0.5A per relay (requires AP and PD).
Type OT	Three passive transistor outputs (NPN) - not isolated. Max. 50V DC - 300mA per output.
Note	Intrinsically Safe applications: only two transistor outputs type OT available.

Operational

Operator functions

Displayed functions	<ul style="list-style-type: none"> • Nine different product or tank values. • Actual value. • Product / tank I.D. • Alarm messages.
---------------------	---

Value

Digits	7 digits.
Units	L, m3, GAL, USGAL, kg, lb, bbl, no unit.
Decimals	0 - 1 - 2 or 3.

Accessories

Mounting accessories

ACFo2	Stainless steel wall mounting kit.
ACFo5	Stainless steel pipe mounting kit (worm gear clamps not included).
ACFo6	Two stainless steel worm gear clamps Ø 44 - 56mm.
ACFo7	Two stainless steel worm gear clamps Ø 58 - 75mm.
ACFo8	Two stainless steel worm gear clamps Ø 77 - 95mm.
ACFo9	Two stainless steel worm gear clamps Ø 106 - 138mm.
ACF11	Swivel with 25° movement from center axis for direct flowmeter mounting: 1" NPT to 1/2" NPT.

Cable glands

ACF20	For HA enclosure, includes O-rings.
ACF25	For HE enclosure, includes locknuts and O-rings.
ACF26	For HF enclosure, includes locknuts and O-rings.
ACF27	For HG enclosure, includes locknuts and O-rings.
ACF28	For HH enclosure, includes locknuts and O-rings.
ACF29	For HJ enclosure, includes locknuts and O-rings.
ACF32	For HM enclosure, includes O-rings.
ACF33	For HN enclosure, includes O-rings.
ACF34	For HO enclosure, includes O-rings.
ACF35	For HP enclosure, includes O-rings.
ACF39	For HT enclosure, includes O-rings.
ACF40	For HU enclosure, includes O-rings.

Intrinsically Safe isolators

ACGo1	MTL5511 - One channel pulse or switch output transfer from hazardous area to safe area.
ACGo2	MTL5525 - One channel power supply from safe area to hazardous area (e.g. to power the unit with PD or to power a switching or analog device in hazardous area).
ACGo3	MTL5541 - One channel 4 - 20mA repeater from hazardous area to safe area.
ACGo4	MTL 5051 - Bi-direction serial-data-isolator (for Modbus communication).
ACGo5	MTL5516C - Two channel pulse or switch output transfer from hazardous area to safe area.
ACGo6	MTL5513 - One channel pulse or switch output transfer from hazardous area to safe area.
ACGo7	MTL5546Y - One channel isolated driver bringing 4 - 20mA from safe area to hazardous area, HART transparent, OCD.


Ordering information

Standard configuration: F193-X-AP-CH-HC-OT-PX-XX-ZX.

Ordering information:

F193 X -A _ -C _ -H _ -O _ -P _ -X _ -Z _


Sensor input signal

X  **No sensor input signal.**


Analog output signal

AA Active 4 - 20mA output - requires PD, PF, PM or PX.

AB Active 0 - 20mA output - requires PD, PF, PM or PX.

AF  I.S. floating 4 - 20mA output - requires XI + PD or PX.

AI Isolated 4 - 20mA output.

AP  **Passive 4 - 20mA output, loop powered unit.**

AU Active 0 - 10V DC output - requires PD, PF, PM or PX.

Communication


CB Communication RS232 - Modbus ASCII / RTU.

CH **Communication RS485 - 2-wire - Modbus ASCII / RTU.**

CI Communication RS485 - 4-wire - Modbus ASCII / RTU.


CT  Intrinsically Safe TTL - Modbus ASCII / RTU.


Panel mount enclosures - IP65 / NEMA Type4X


HB  Aluminum enclosure.


HC  **GRP enclosure.**


GRP field / wall mount enclosures - IP67 / NEMA Type4X


HD  Cable entry: no holes.


HE  Cable entry: 2 x Ø 16mm & 1 x Ø 20mm.

HF  Cable entry: 1 x Ø 22mm (7/8").


HG  Cable entry: 2 x Ø 20mm.


HH  Cable entry: 6 x Ø 12mm.


HJ  Cable entry: 3 x Ø 22mm (7/8").


HK  Flat bottom, cable entry: no holes.

Aluminum field / wall mount enclosures - IP67 / NEMA Type4X


HA  Cable entry: 2 x PG9 & 1 x M20.


HL  Cable entry: 2 x 1/2"NPT.


HM  Cable entry: 2 x M16 & 1 x M20.


HN  Cable entry: 1 x M20.


HO  Cable entry: 2 x M20.

HP  Cable entry: 6 x M12.

HT  Cable entry: 1 x 1/2"NPT.

HU  Cable entry: 3 x 1/2"NPT.

HV  Cable entry: 4 x M20.


HZ  Cable entry: no holes.

Digital output signals


OA Three active transistor outputs - requires PD, PF, PM or PX.

OR Two mechanical relay outputs + one OT or OA - requires PF or PM.

OS Four mechanical relay outputs - requires AP and PD.

OT  **Three passive transistor outputs - standard configuration.**

Power requirements

PD  8 - 24V AC / DC + sensor supply - with XI: 16 - 30V DC.


PF 24V AC / DC + sensor supply.

PM 115 - 230V AC + sensor supply.


PX  **No power supply option.**

Additional battery supply (optional)

PB Lithium battery powered - requires PD or PX.

PC  Lithium battery powered - Intrinsically Safe - requires XI, and PD or PX.

Hazardous area

XI  Intrinsically Safe, according ATEX and IECEx.

XF Ex d enclosure - 3 keys according ATEX.


XX **Safe area only.**

Other options

ZB Backlight.

ZX  **No options.**

The bold marked text contains the standard configuration.

 Available Intrinsically Safe.

Specifications are subject to change without notice.



Quality
ISO 9001

www.dekra-seal.com

Fluidwell bv
P.O. Box 6
5460 AA - Veghel - The Netherlands
Telephone: +31 (0)413 343 786
Telefax: +31 (0)413 363 443
email: displays@fluidwell.com
Internet: www.fluidwell.com

