



red-y industrial series product information

Thermal Mass Flow Meters and Controllers for Gases with IP67 & Ex Protection

ICENTA 

In Partnership with

vögtlin 
instruments

High accuracy for heavy duties: Mass Flow Meters & Controllers with IP67 & Ex Protection

**Reliable technology and industry standard interfaces for rough environments:
Our tried and tested thermal mass flow meters and controllers for gases now available
as IP67/NEMA 6 version.**

Accurate measurement

The devices offer high accuracy and a wide dynamic range.

2 instrument versions:
<Standard> and <Hi-Performance>

Accuracy up to $\pm 0.3\%$ of full scale + $\pm 0.5\%$ of reading

Turndown ratio 1 : 100

Extended turndown ratio on request

Analog & digital: 2 in 1



The flow meters & controllers make use of the latest CMOS technology and have a digital (Modbus RTU) and analog interface as standard

IP67/NEMA 6 protection



The instruments offer IP67 / NEMA 6 protection against solid particles and water

ATEX certification



red-y industrial devices come along with ATEX certification (Category 3/Zone 2 & 22)

Multiple connections



The industrial series are available with different connection types: Cable gland with compression fitting or optional M12 plug on top

Options




Multigas device

A device can be used for up to 10 different gases or gas mixtures



Profibus

The instruments are available with Profibus interface: DP-V0 & DP-V1 protocols

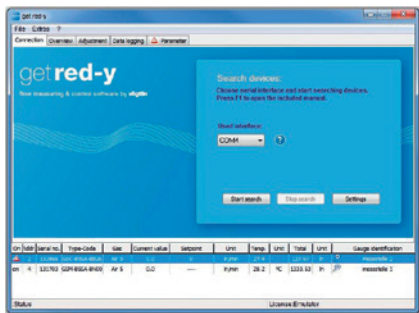

Setup tool <get red-y>

Efficient device setup with the free <get red-y> software:

- » **Service tool for remote maintenance**
- » **Switch gas type**
- » **Switch measurement units**
- » **Adjust control parameters**

3-year warranty*




High-quality components ensure long and trouble-free operation

*does not apply to calibration, options and accessories

Available connections «red-y industrial series»

Cable gland (standard)

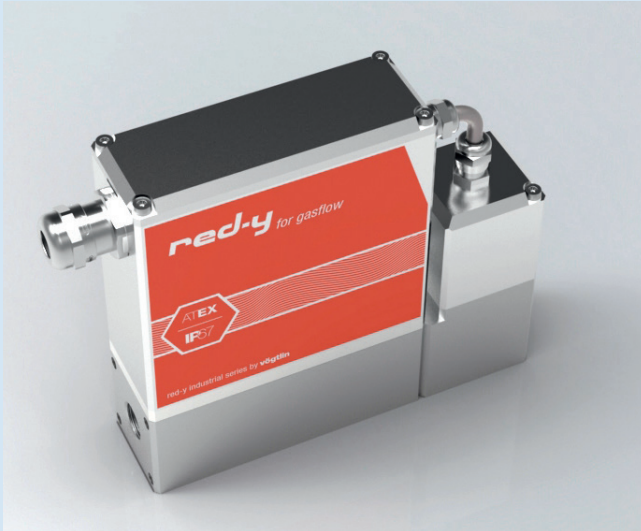

Cable gland with optional Profibus




M12 plug (option)



M12 plug with optional Profibus



Dimensions «red-y industrial series»

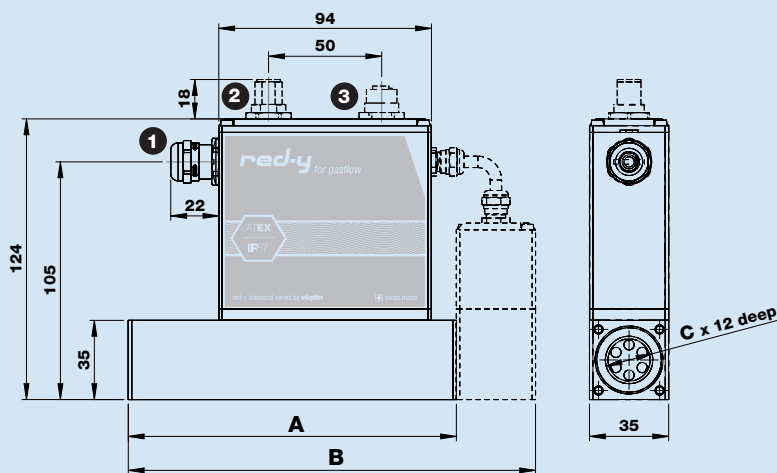

Type	Length (mm)		Process Connection
	A	B	C
GIM-A	94	-	G1/4"
GIM-B			
GIM-C			
GIM-D	145	-	G1/2"
GIC-A	-	134	G1/4"
GIC-B			
GIC-C			
GIC-D	-	180	G1/2"
GIC-D valve type 8	-	198	G1/2"

Electrical Connection

- 1 Cable gland / cable diameter 6-8mm
- 2 M12 connector A-Coding 8pol male
- 3 M12 connector B-Coding 5pol female

Technical Data «red-y industrial series»

Instrument types



industrial meter GIM
Thermal mass flow meter



industrial controller GIC
Thermal mass flow controller



industrial controller GIE
Thermal mass flow controller with external valve

Instrument versions

«Standard» The economic solution	Accuracy: ± 1.0% of full scale ⁽¹⁾ Turndown ratio: 1 : 50
«Hi-Performance» With highest accuracy and turndown ratio (available for GIM < 200 l/n/min / GIC < 150 l/n/min (air))	Accuracy: ± 0.3% of full scale + ± 0.5% of reading ⁽¹⁾ Turndown ratio: 1 : 100 ¹ An additional error of ±0.25% may apply for analogue signals

Measuring ranges

(Air/Full scale freely selectable)	Type	Measuring range (air)		Process Connection
red-y industrial meter GIM Meter	GIM-A	from 0 ... 25 ml/n/min	to 0 ... 600 ml/n/min	G $\frac{1}{4}$ "
	GIM-B	from 0 ... 600 ml/n/min	to 0 ... 6000 ml/n/min	G $\frac{1}{4}$ "
	GIM-C	from 0 ... 6 l/n/min	to 0 ... 60 l/n/min	G $\frac{1}{4}$ "
	GIM-D	from 0 ... 60 l/n/min	to 0 ... 450 l/n/min	G $\frac{1}{2}$ "
red-y industrial controller GIC controller	GIC-A	from 0 ... 25 ml/n/min	to 0 ... 600 ml/n/min	G $\frac{1}{4}$ "
	GIC-B	from 0 ... 600 ml/n/min	to 0 ... 6000 ml/n/min	G $\frac{1}{4}$ "
	GIC-C	from 0 ... 6 l/n/min	to 0 ... 60 l/n/min	G $\frac{1}{4}$ "
	GIC-D	from 0 ... 60 l/n/min	to 0 ... 450 l/n/min	G $\frac{1}{2}$ "

Performance data

Media (real gas calibration)	Air, O ₂ ⁽²⁾ , N ₂ ⁽²⁾ , He, Ar, CO ₂ , H ₂ , CH ₄ , C ₃ H ₈ (other gases and gas mixtures on request) ² O ₂ & N ₂ are calibrated with air
Response time	Meter (GIM): ± 80ms ⁽³⁾ ; Controller (GIC): ± 500ms ⁽³⁾ ³ depending on device configuration & according to SEMI standard E17-1011, 5-100% of range under optimized conditions
Repeatability	± 0.2% of full scale (according to SEMI standard E56-0309)
Longterm stability	< 1% of measured value / year
Power supply	24 Vdc (18 – 30 Vdc), 15 Vdc on request
Current consumption	Meter (GIM): max. 100 mA; Controller (GIC): max. 250 mA (GIC with valve type 8 max. 410mA)
Operation pressure	0.2 – 11 bara (GIC with valve type 4.5 and 8 max. 8 bar a)
Temperature (environment/gas)	0 – 50°C
Pressure sensitivity	Less than 0.2% RD per bar (typical N ₂)
Temperature sensitivity	Less than 0.025% FS per °C (typical N ₂)
Warm-up time	< 1 sec. for full accuracy

Materials

Body	Stainless steel 316L (see operating instructions for wetted parts)
Electronic Housing	Aluminum
Seals	EPDM (FDA), optional FKM and FFKM

Integration

In- / Output signals analog	0..20 mA, 4..20 mA, 0..5 V, 1..5 V, 0..10 V, 2..10 V
In- / Output signals digital	RS-485; Modbus RTU 2 wire (Slave); Lab View-VIs available / Option: Profibus DP-V0, DP-V1
Process connection	G $\frac{1}{4}$ " (BSPP ⁽⁴⁾ female) up to 60 l/n/min, G $\frac{1}{2}$ " (BSPP ⁽⁴⁾ female) up to 450 l/n/min ⁴ British Standard Pipe Parallel
Inlet section	None required
Electrical connection	Cable gland with compression fitting M16x1.5 / Option: M12 plug (DIN-standard) (both connection IP67 protected)
Mounting orientation	All orientations are possible. We recommend horizontal mounting. Please contact the manufacturer for further information.

Safety

Test pressure	16 bara
Leak rate	< 1 x 10 ⁻⁶ mbar l/s He
Environmental protection	IP67 (conforms to NEMA 6)
EMC	CE EN 61326-1
ATEX Certification	Ex II 3G nA IIC T4 Gc (Category 3/Zone 2) Ex II 3D Ex tc IIIC T100°C Dc (Category 3/Zone 22)

Type code «red-y industrial series»

Instrument type	red-y industrial series (Gas)	G	I																	
Function	Meter																			M
	Controller																			C
	Controller with external valve																			E
Full scale of measuring range (air) defined by manufacturer	Customer-specific (Divider A, up to 600 mln/min)																			A X
	Customer-specific (Divider B, up to 6000 mln/min)																			B X
	Customer-specific (Divider C, up to 60 l/min)																			C X
	Customer-specific (Divider D, up to 450 l/min)																			D X
Instruments version	Standard ($\pm 1.0\%$ full scale, 1 : 50)																			S
	Hi-Performance ($\pm 0.3\%$ full scale, $\pm 0.5\%$ reading, 1 : 100)																			T
	Customer-specific/OEM																			K
Connection/Materials (body, seals)	Cable gland/Stainless steel/EPDM (FDA)**																			S
	M12 plug/Stainless steel/EPDM (FDA)																			T
	Cable gland/Stainless steel/FKM																			U
	M12 plug/Stainless steel/FKM																			V
	Customer-specific/OEM																			K
Analog signals (output)	Current 4..20 mA**																			B
	Current 0..20 mA																			C
	Voltage 0..5 V																			D
	Voltage 1..5 V																			E
	Voltage 0..10 V																			F
	Voltage 2..10 V																			G
	Customer-specific/OEM																			K
Analog signals (input)	Current 4..20 mA**																			B
	Current 0..20 mA																			C
	Voltage 0..5 V																			D
	Voltage 1..5 V																			E
	Voltage 0..10 V																			F
	Voltage 2..10 V																			G
	Not defined																			N
	Customer-specific/OEM																			K
Control valve (integrated) defined by manufacturer	Type 0.1																			2 1
	Type 0.2																			2 2
	Type 0.5																			2 3
	Type 1.2																			2 6
	Type 4.5																			1 2
	Type 8.0																			1 3
	Valve mounted																			9 5
	Customer-specific/OEM																			9 9
	No valve																			0 0
	Type code		G	I	-	-														

**standard

Worldwide TAsi Flow Network



Vögtlin Sales & Service Hub North America:

AW-Lake Company

2440 W. Corporate Preserve Dr. #600
Oak Creek, WI 53154, USA

Phone +1 414 574 4300
Fax +1 414 574 4301

info@aw-lake.com

www.aw-lake.com

International Headquarter:

Vögtlin Instruments GmbH

Langenhagstrasse 1
4147 Aesch BL, Switzerland

Phone +41 61 756 63 00
Fax +41 61 756 63 01

info@voegtlin.com

www.voegtlin.com

Vögtlin Sales & Service Hub China:

KEM flow technology (Beijing) Co., Ltd.

Rm. 906, Block C, RuiPu Office Bldg,
No. 15, HongJunYingNan Road,
Chaoyang District, Beijing 100012, China

Phone +86 10 849 29567

info@kem-kueppers.cn

www.voegtlin.cn

ICENTA



In Partnership with

